

# eComo

# Technical description

## 1. Desks

### 1.1. Table top

Fixed table tops, rectangular – made of melamine faced chipboard (MFC), thickness 25 mm, 2 mm edge in glue technology.

### 1.2. Base

**T-frame leg with electric height adjustment (single-engine drive)** – leg consisting of a two-segment column made of steel profile – dimensions: 80 × 50 mm, 75 × 45 mm, from bottom to top respectively. Foot, length 590 mm, equipped with glides levelling in range of + 10 mm. Plug standard: European (EU), British (GB).

Control panel – up / down adjustment button with display.

Anti-Collision function – overload (adjustable sensitivity).

Telescopic frame – adjustment in range of 1200–1600 mm.

Finish options – powder-coated in Jet Black (RAL 9005), Pure White (RAL 9010), White Alumniu (RAL 9006)

### 1.3. Assembly and packaging


Unassembled, cardboard packaging (PACK-UA) – 2 boxes.

### Technical parameters:

- Anti-collision function,
- 720–1200 mm adjustment range,
- protection against overheating,
- smooth start & stop,
- smooth up & down movement,
- speed 21 mm/s with maximum permissible load,
- noise < 48 dB,
- power consumption in standby mode 0.5 W,
- load capacity 60 kg considering table top,
- drive system: alternating current.


### 1.4. Product range

#### Base

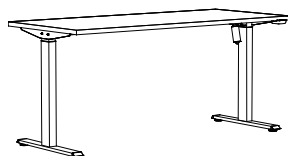

T-leg with electric height adjustment

#### Table tops

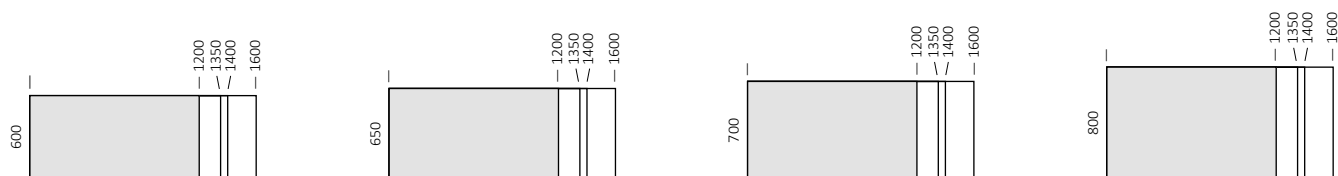

## 2. Cable management

Horizontal wire trunking – made of black plastic, dimensions 280 × 68 mm, assembly to table top.

Vertical wire trunking – made of mesh (black OP mesh), zipped with zip fastening.

Assembly to table top with plastic connectors. Length 1500 mm, diameter 38 mm.

**Omega Ekspres SIA**

LV40003402577

Biroja adrese: Lāčplēša 125, LV-1003, Rīga

[www.city-office.lv](http://www.city-office.lv)

info@city-office.lv

