

# Pedestals KDT, KD technical specification



.mdd

**.mdd has a leading position among manufacturers of office furniture with many awards that prove quality and continuously increase demand for it's products.**

The realities of today`s market require constant quality improvement at all levels of modern organization. This applies in particular to customer service, marketing, quality of products and also to quality of processes within the company. Partnership relations among employees and with business partners form a base of economic growth and success of the company.

Constant investments in innovative machinery park, optimization of managment systems and an expansion of production halls allow to minimize the lead times for the product of the highest quality.

**More than twenty years of experience in office furniture industry come with reference from a long list of companies and institutions to show their appreciation for an efficient and comprehensive service.**

**.mdd is hgly aware of the environment.**

Being located in the forest region with lake by itis side, .mdd takes the nature seriously and invests constantly in a modern and energy-efficient solutions to preserve the local life. Company puts emphasis on waste segregation and recycling. .mdd has been awarded for the exceptional care and involvement in waste disposal. All materials used are environmentally friendly and enjoy a high 95 % rate of being recycled.



## General informations:

### Warranty:

.mdd products - **5 years**.  
Electrical components and  
fabric - **2 years**.

### Certificate - MFC:



### Assembly:

the product comes pre-assembled

### Packing:

cardboard


### Compliant with standards:

PN-EN 14073-2:2006

### Boards density:

12 mm - 690 - 750 kg/m<sup>3</sup>  
18 mm - 650 - 690 kg/m<sup>3</sup>  
28 mm - 610 - 630 kg/m<sup>3</sup>  
36 mm - 610 - 630 kg/m<sup>3</sup>

### Material composition \*:

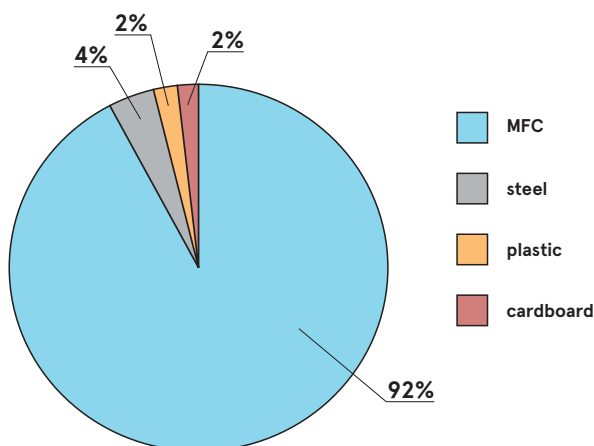

\* according to the EPD document

### Recyclability \*\*

Recycling: 60% - Downcycling: 40%

### Recycled content


2,1%

### Co2 carbon footprint

1,1 kg

\*\* average values for a representative of the group;  
values may vary for other products


## Mobile pedestals - Standard

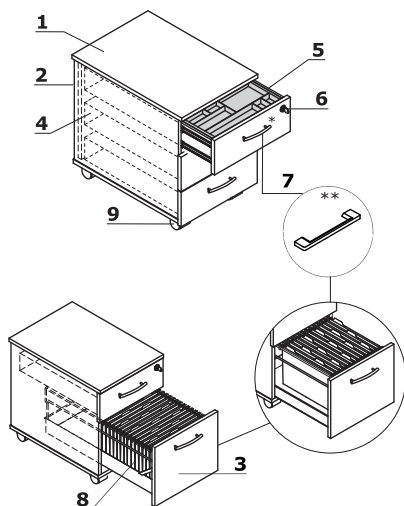


1. **Top** - MFC 18 mm, ABS edge
2. **Body** - MFC 18 mm, ABS edge
3. **Front** - MFC 18 mm, ABS edge
4. **Metal drawer** - roll runners, max load 25 kg, 80% extraction, anti-tilt mechanism; OPTION WITH EXTRA CHARGE - ball runners, soft-closing system
5. **Pencil tray** - plastic, colour: black
6. **Central lock** - foldable key
7. **Aluminum handle**:  
\* Standard  
\*\* OPTION WITH EXTRA CHARGE - handle Pro
8. **Suspension files drawer** - ball runners, max load 30 kg, 100% extraction, A4 folders can be situated parallelly and perpendicularly to the front
9. **Castors** - Ø50 mm, two with brakes

ATTENTION - sitting on the pedestal possible only after mounting the cushion (SKP13); the pedestal with cushion is intended for sitting only  
- moving the pedestal while sitting may result in damaging the castors

## Stationary pedestals - Standard

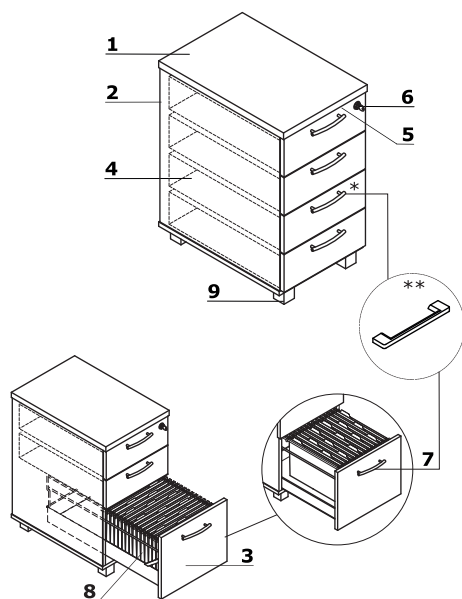


1. **Top** - MFC 28 mm, ABS edge
2. **Body** - MFC 18 mm, ABS edge
3. **Front** - MFC 18 mm, ABS edge
4. **Metal drawer** - roll runners, max load 25 kg, 80% extraction, anti-tilt mechanism; OPTION WITH EXTRA CHARGE - ball runners, soft-closing system
5. **Pencil tray** - plastic, colour: black
6. **Central lock** - foldable key
7. **Aluminum handle**:  
\* Standard  
\*\* OPTION WITH EXTRA CHARGE - handle Pro
8. **Suspension files drawer** - ball runners, max load 30 kg, 100% extraction, A4 folders can be situated parallelly and perpendicularly to the front
9. **Leveling** - 10 mm range

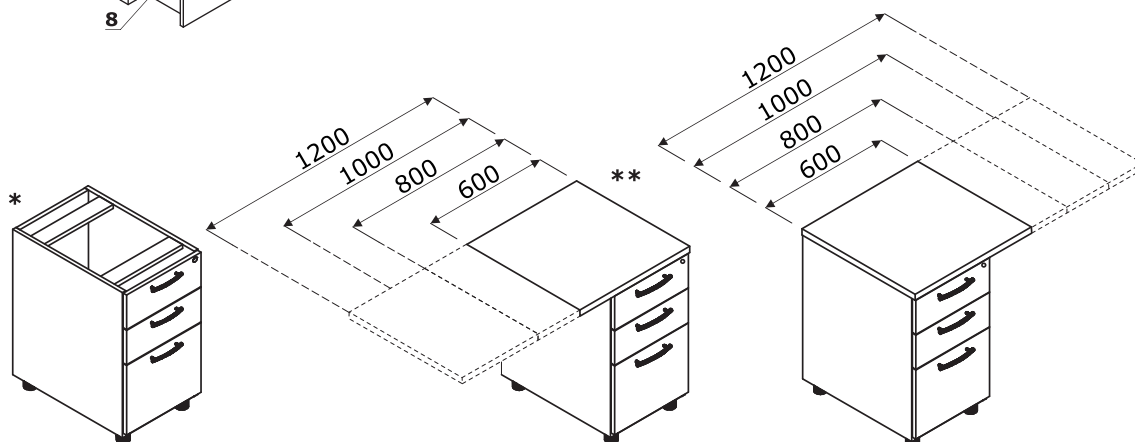

Stack-on tambour storage for pedestal

- 1. **Top** - MFC 28 mm, ABS edge
- 2. **Body** - MFC 18 mm, ABS edge
- 3. **Front** - tambour
- 4. **Patent lock**



Mobile pedestals – Standard \*




**KDT12**  
402 / 600 / 586  
30 kg



**KDT120**  
402 / 800 / 586  
33 kg



**KDT13**  
402 / 600 / 586  
23 kg



**KDT130**  
402 / 800 / 586  
28 kg

Stationary pedestals – Standard \*



**KDT63**  
402 / 600 / 740  
27 kg



**KDT73**  
402 / 800 / 740  
32 kg



**KDT64**  
402 / 600 / 740  
28 kg



**KDT74**  
402 / 800 / 740  
31 kg

\* dimensions expressed in millimeters: width x depth x height

## Pedestals without tops - Standard \*




**KDT063**  
400 / 600 / 712  
25 kg



**KDT073**  
400 / 800 / 712  
25 kg



**KDT064**  
400 / 600 / 712  
25 kg



**KDT074**  
400 / 800 / 712  
28 kg

## Pedestals with top o verhang - Standard \*




**KD663**  
600 / 600 / 740  
33.5 kg




**KD673**  
600 / 800 / 740  
36.4 kg




**KD664**  
600 / 600 / 740  
33.5 kg




**KD674**  
600 / 800 / 740  
39.4 kg




**KD863**  
800 / 600 / 740  
36.4 kg




**KD873**  
800 / 800 / 740  
38.3 kg




**KD867**  
800 / 600 / 740  
36.4 kg




**KD874**  
800 / 800 / 740  
41.3 kg



**KD1063**  
1000 / 600 / 740  
38.4 kg



**KD1073**  
1000 / 800 / 740  
41.75 kg




**KD1064**  
1000 / 600 / 740  
38.4 kg


**KD1074**  
1000 / 800 / 740  
44.75 kg

\* dimensions expressed in millimeters: width x depth x height


Pedestals with top overhang - Standard \*




**KD1263**  
1200 / 600 / 740  
40.4 kg



**KD1273**  
1200 / 800 / 740  
44.95 kg




**KD1264**  
1200 / 600 / 740  
40.4 kg




**KD1274**  
1200 / 800 / 740  
47.95 kg

Pedestal cushion




**SKP13**  
400 / 600 / 52  
3 kg


Desktop storage \*



**A1L02**  
800 / 402 / 389  
18.8 kg




**A1L04P**  
800 / 402 / 389  
22.15 kg



**A1L04L**  
800 / 402 / 389  
19 kg

Upholstered panel for cabinets A1L02, A1L04P i A1L04L \*



**PA1L**  
761 / 341 / 22  
5 kg


\* dimensions expressed in millimeters: width x depth x height

## Top, body, base, front



## SKP13, PA1L


### Fabric Nemo

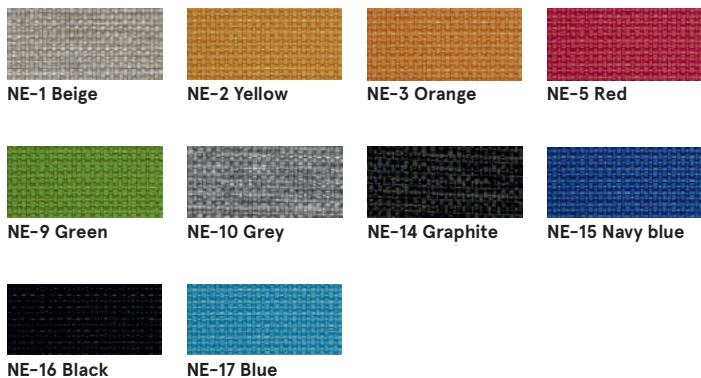

#### Technical data:

Material	polyester 100%
Fabric weight	366g/m2
Abrasion resistance rubs	PN_EN ISO 12947 - 2:2 100,000
Pilling resistance	scale 1-8, max. 8, PN-EN ISO 105 - B02 (3-4)
Colour fastness to light	scale 1-5, max. 5, PN-EN 1021 - 2,
Colour fastness to rubbing	PN-EN 1021 - 1 skale 1-5, max. 5, EN ISO 105x12 (wet/dry) 4-5

## Fabric Runner - second price group

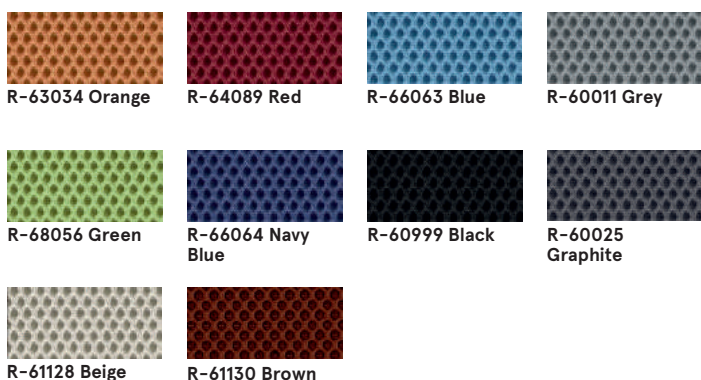

#### Technical data:

Material	polyester 100%
Fabric weight	510 g/lm (16.45 oz/lin.yd.)
Abrasion resistance rubs	BS EN ISO 12947-2 70,000 Martindale cycles
Pilling resistance	scale 1-5, max 5, EN ISO 12945-2 (4-5)
Colour fastness to light	scale 1-8, max 8, EN ISO 105-B02 (5-7)
Colour fastness to rubbing	scale 1-5, max 5, EN ISO 105x12 (wet/dry) 4-5
Acoustic test sound absorption	ISO 354
Flammability	BS EN 1021-2 Match, CA TB 117-2013, BS EN 1021-1 (cigarette) Class Uno UNI 9175 Class 2, EMME

\* body - II group



## Fabric Medley – second price group



### Technical data:

<b>Material</b>	polyester 100%
<b>Fabric weight</b>	510 g/lm (16.45 oz/lin.yd.)
<b>Abrasion resistance rubs</b>	BS EN ISO 12947-2, 75,000 cykli Martindale
<b>Pilling resistance</b>	scale 1-5, max. 5, EN ISO 12945-2 (4)
<b>Colour fastness to light</b>	scale 1-8, max. 8, EN ISO 105-B02 (5-7)
<b>Colour fastness to rubbing</b>	scale 1-5, max. 5, EN ISO 105x12 (wet/dry (4-5/4-5))
<b>Acoustic test sound absorption</b>	ISO 354
<b>Flammability</b>	BS EN 1021-1 (cigarette) BS 476 Part 7, Class 2 Class Uno UNI 9174 - UNI 8457 CA TB 117-2013 ASTM E 84 Class I

## Fabric Atlantic \* – second price group



### Technical data:

<b>Material</b>	polyester 100%
<b>Fabric weight</b>	530 g/lm (17.09 oz/lin.yd.)
<b>Abrasion resistance rubs</b>	BS EN ISO 12947-2, 110,000 Martindale cycles
<b>Pilling resistance</b>	scale 1-5, max. 5, EN ISO 12945-2 (4-5)
<b>Colour fastness to light</b>	scale 1-8, max. 8, EN ISO 105-B02 (5-7)
<b>Colour fastness to rubbing</b>	scale 1-5, max. 5, EN ISO 105x12 (wet/dry)
<b>Flammability</b>	CA TB 117-2013 ASTM E 84 Class I BS EN 1021-2 (match) BS EN 1021-1 (cigarette)

## Fabric Vita – second price group




### Technical data:

<b>Material</b>	Surface: 98,5% PVC, 1,5% PU Substrate: 50% poliester, 50% Cotton
<b>Fabric weight</b>	850g/m2 ± 10% (1190G/lin. m ± 10%)
<b>Abrasion resistance rubs</b>	BS EN ISO 5470-2, 100,000 Martindale cycles
<b>Colour fastness to light</b>	6 (ISO 105 - B02)
<b>Colour fastness to rubbing</b>	wet: 4, dry: 4 (ISO 105 - X12)
<b>Flammability</b>	BS EN 1021 - (cigarette) BS EN 1021 - 2 (match) BS 5852 - (Ignition Source 5) BS 7176 - (Medium Hazard)
<b>Flexes</b>	BS EN ISO 7854 - Method B, 400.000 Flexing cycles
<b>Anti-microblal / Anti-fungal</b>	AATCC 147

\* There is a possibility of ordering the product in full colour spectrum of Atlantic range, as per Gabriel's pattern book, within 8 weeks

## Fabric Mica – second price group

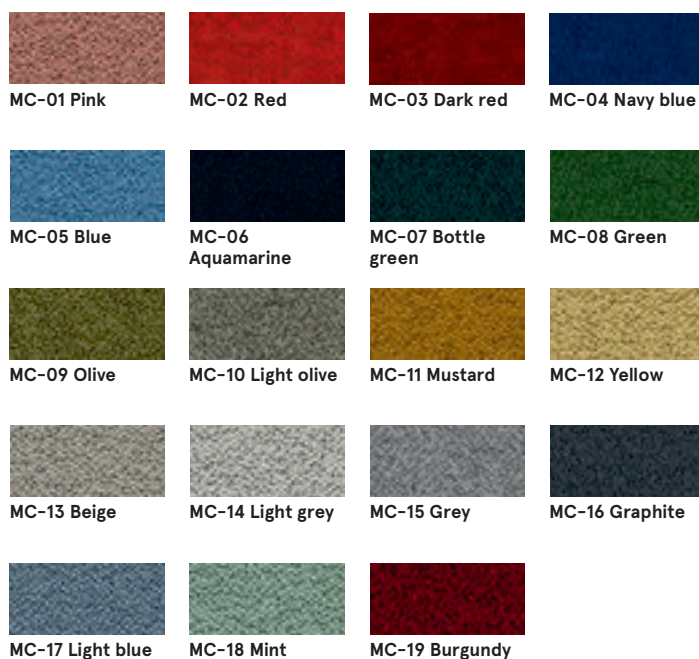

### Technical data:

<b>Material</b>	post-consumer recycled polyester 97%, polyester 3%
<b>Fabric weight</b>	305 g/lm
<b>Abrasion resistance rubs</b>	60,000 rubs martindale (EN ISO 12947-2)
<b>Pilling resistance</b>	scale 1-5, max. 5 - EN ISO 12945-2, 4-5
<b>Light fastness</b>	scale 1-8, max. 8 - EN ISO 105-B02, 5-8
<b>Rubbing fastness</b>	dry: 4-5, wet: 4-5, scale 1-5, max. 5 - EN ISO 105x12
<b>Flammability</b>	CA TB 117-2013 ASTM E 84 Class I BS EN 1021-1 Cigarette BS EN 1021-2 Match BS 476 Part 7 class I

## Fabric Charles \* – second price group




### Technical data:

<b>Material</b>	100% polyester
<b>Fabric weight</b>	433g/m2
<b>Abrasion resistance rubs</b>	90,000 Martindale cycles (EN ISO 12947-2)
<b>Pilling resistance</b>	EN ISO 12945-2, 5
<b>Light fastness</b>	EN ISO 105-B02, 5
<b>Rubbing fastness</b>	dry: 4-5, wet: 4-5, EN ISO 105x12
<b>Flammability</b>	EN 1021, 1

\* There is a possibility of ordering the product in full colour spectrum of Charles range, as per Dekoma pattern book, within the standard delivery time.

## Fabric Go Check – second price group

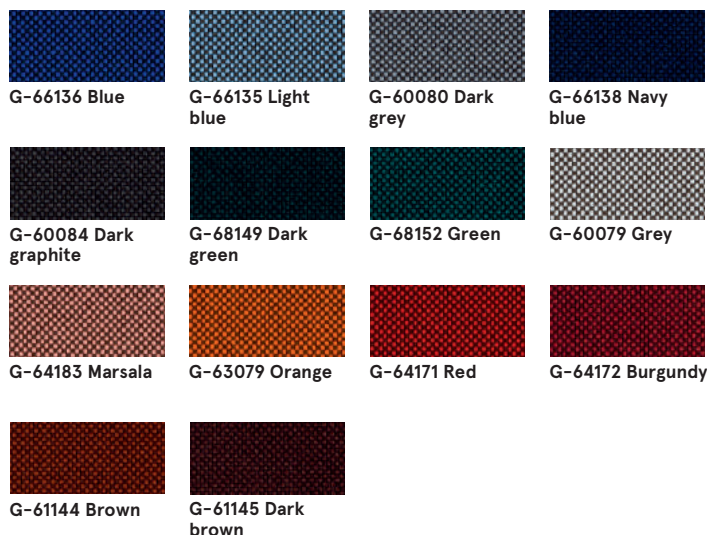

### Technical data:

<b>Material</b>	100% Trevira CS
<b>Fabric weight</b>	435g/lm
<b>Abrasion resistance rubs</b>	80,000 rubs martindale (EN ISO 12947-2)
<b>Pilling resistance</b>	scale 1-5, max. 5 – EN ISO 12945-2, 5
<b>Light fastness</b>	scale 1-8, max. 8 – EN ISO 105-B02, 5-8
<b>Rubbing fastness</b>	dry: 4-5, wet: 4-5, scale 1-5, max. 5 – EN ISO 105x12
<b>Flammability</b>	BS EN 1021 1&2 Cigarette and Match BS EN 1021-1 Cigarette BS 5852 Crib 5 BS 7176 Medium hazard DIN 4102 – B1 NFP 92-503/504/505 M1 ÖNORM A3800-B1-B3825-Q1 UK Class Uno UNI 9175 Class 1 I EMME FAR/JAR 25.853 (a) (i) (ii) CA TB 117-2013 DIN EN 13501-1 B-s1,d0 AM 18 – NF D 60-013-(only for fabric)

## Fabric Synergy – third price group



### Technical data:

<b>Composition</b>	95% Virgin Wool, 5% Polyamide
<b>Fabric weight</b>	400g/m2 (560g/lm)
<b>Abrasion resistance rubs</b>	100.000 Martindale cycles
<b>Colour fastness to light</b>	ISO 105 – B02 5
<b>Colour fastness to rubbing</b>	EN ISO 105x12 4-4 (dry/wet)
<b>Flammability</b>	EN 1021 – 1&2 (cigarette & match) BS 7176 Low Hazard NF D 60-013 ÖNORM B 3825 & A 3800-1 (58 kg/m3 CMHR Foam) UNI 9175 Classe 1 IM EN 13501-1 Adhered Class D, s1, d0 IMO FTP Code (Part 8) The Furniture and Furnishing (Fire) (Safety) Regulations 1988 (Domestic Cigarette and Match) BS 5852 Ignition Source 5 when FR treated BS 7176 Medium Hazard when FR treated EN 13501-1 Adhered Class B, s1, d0 when FR treated EN 13501-1 Un-adhered Class D, s2, d0 when FR treated BS 5867-2: Type B Curtains & Drapes when FR treated

## Fabric Silvertex – third price group

There is a possibility of ordering the product in full colour spectrum of Silvertex range, as per Spradling's pattern book, within 15 working days.

### Technical data:

<b>Material</b>	Topcoat: 100% Vinyl Backing: 100% Polyesterr Hi-Loft™
<b>Fabric weight</b>	685 gr/m2
<b>Abrasion resistance</b>	>300,000 cycles Martindale
<b>UV-resistance</b>	>= 7 (1000 hours, blue wool scale)
<b>Cold Crack resistance</b>	-23°C
<b>Flame retardancy</b>	NF P 92-503 / M2 EN 1021, Part 1&2 DIN 4102 B2 ÖNORM B 3825, Gruppe I – Schwerbrennbares Verhalten ÖNORM A 3800, Teil I, Qualmbildungsklasse Q1 – schwachqualmend IMO Res. MSC.307 (88) (2010 FTP Code) Annex I Part 8 (MED) Marine Equipment Directive in its current valid version UNI 9175 (1987) / UNI 9175/FAI (1994) Classe I.IM (uno I EMME) UNE 23.727-90 IR /M2 EN 71-2: 2006+AI: 2007 Safety of Toys – Part 2: Flammability ECE R 118 (replaces Directive 95/28/EC) FMVSS 302 FAR 25/853
<b>Antimicrobial</b>	Antifungal Protection, Antibacterial Protection, Antimycotic Protection


## Fabric Tessa – third price group



### Technical data:

<b>Material</b>	95% polyester, 5% acrylic
<b>Fabric weight</b>	500g/m2
<b>Abrasion resistance rubs</b>	75,000 Martindale cycles (EN ISO 12497-2)
<b>Pilling resistance</b>	EN ISO 12945-2, 4-5
<b>Light fastness</b>	EN ISO 105-B02, 4
<b>Rubbing fastness</b>	dry: 4-5, wet: 4-5, EN ISO 105x12

## Fabric Oceanic – third price group

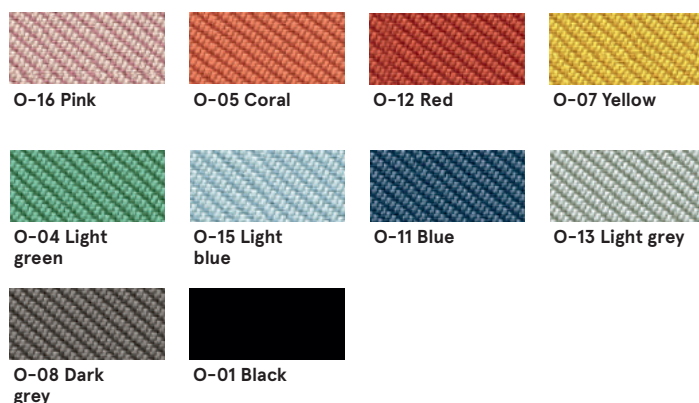


### Technical data:

<b>Material</b>	100% post-consumer recycled polyester
<b>Fabric weight</b>	497g/m2
<b>Abrasion resistance rubs</b>	100,000 Martindale cycles (EN ISO 12947-2)
<b>Pilling resistance</b>	EN ISO 12945-2, 5
<b>Light fastness</b>	EN ISO 105-B02, 5
<b>Rubbing fastness</b>	dry: 4, wet: 4, EN ISO 105x12
<b>Flammability</b>	EN 1021, - 1&2 (Cigarette and Match) BS 7176 Low Hazard BS 5852 Ignition Source BS 7176 Medium Hazard



## Fabric Quest – third price group

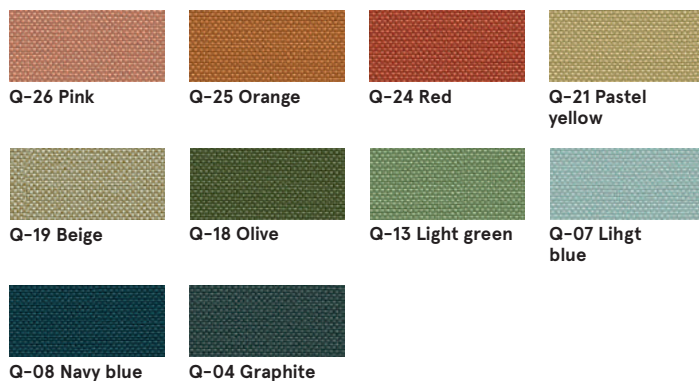

### Technical data:

<b>Material</b>	100% post-consumer recycled polyester
<b>Fabric weight</b>	330g/m <sup>2</sup>
<b>Abrasion resistance rubs</b>	100,000 Martindale cycles (EN ISO 12947-2)
<b>Light fastness</b>	EN ISO 105-B02, 4-6
<b>Rubbing fastness</b>	dry: 4, wet: 4, EN ISO 105x12
<b>Flammability</b>	EN 1021, - 1&2 (Cigarette and Match) BS 7176 Low Hazard UNI 9175 Classe 1 IM BS 476 Part 7 Class 1Y (Adhered) EN 13501-1 Adhered Class B, s1, d0 EN 13501-1 Un-adhered Class B, s1, d0 BS 5852 Ignition Source 5 with EnviroFlam5 BS 7176 Medium Hazard with EnviroFlam5 IMO FTP Code (Part 8) with EnviroFlam5

## Fabric Grain – third price group



### Technical data:

<b>Material</b>	92% post-consumer recycled polyester 8% polyester
<b>Fabric weight</b>	615g/m <sup>2</sup>
<b>Abrasion resistance rubs</b>	100,000 Martindale cycles (EN ISO 12947-2)
<b>Pilling resistance</b>	EN ISO 12945-2, 5
<b>Light fastness</b>	EN ISO 105-B02, 5-7
<b>Rubbing fastness</b>	dry: 4-5, wet: 4-5, EN ISO 105x12
<b>Flammability</b>	BS EN 1021 1&2 Cigarette and Match BS EN 1021-1 Cigarette CA TB 117-2013

## Fabric Atlas – fourth price group



### Technical data:

<b>Material</b>	90% new wool, 10% nylon
<b>Fabric weight</b>	286g/m <sup>2</sup> , 400g/lm
<b>Abrasion resistance rubs</b>	100,000 cycles Martindale, EN ISO 12947
<b>Colour fastness to light</b>	ISO 105 B02: 6-7
<b>Colour fastness to rubbing</b>	ISO 105-X12:2001, (wet/dry) 4-5/4-5
<b>Flammability</b>	BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 5 5852 Crib 5, BS 5852 ignition source 3, BS 5852 Part 1, NF D 60 013, UNI 9175 1IM, US Cal. Bull. 117-2013

## Leather – fourth price group



### Technical data:

<b>Material</b>	Leather type - corrected grain leather Type of finishing - pigmented leather
<b>Abrasion resistance rubs</b>	Dry: 500 cycles - min. 4 grey scale Wet: 250 cycles - min. 4 grey scale UNI EN ISO 11640
<b>Colour fastness to light</b>	Light fastness: min. 4 grey scale, UNI ISO 105-802
<b>Flammability</b>	No ignition UNI EN 1021-1-2006 BS EN 1021-1-2006