

Mesh – Sofa

technical specification



.mdd

.mdd has a leading position among manufacturers of office furniture with many awards that prove quality and continuously increase demand for it's products.

The realities of today's market require constant quality improvement at all levels of modern organization. This applies in particular to customer service, marketing, quality of products and also to quality of processes within the company. Partnership relations among employees and with business partners form a base of economic growth and success of the company.

Constant investments in innovative machinery park, optimization of management systems and an expansion of production halls allow to minimize the lead times for the product of the highest quality.

More than twenty years of experience in office furniture industry come with reference from a long list of companies and institutions to show their appreciation for an efficient and comprehensive service.

.mdd is highly aware of the environment.

Being located in the forest region with lake by its side, .mdd takes the nature seriously and invests constantly in a modern and energy-efficient solutions to preserve the local life. Company puts emphasis on waste segregation and recycling. .mdd has been awarded for the exceptional care and involvement in waste disposal. All materials used are environmentally friendly and enjoy a high 95 % rate of being recycled.



General informations:

Warranty:

.mdd products - **5 years**.
Electrical components and
fabric - **2 years**.

Certificate - MFC:



Certificate - fabric:



Assembly:

the product comes pre-assembled

Packing:

cardboard


Plate density:

12 mm - 690 - 750 kg/m³
18 mm - 650 - 690 kg/m³
28 mm - 610 - 630 kg/m³
36 mm - 610 - 630 kg/m³

Prizes and awards:



Material composition *:

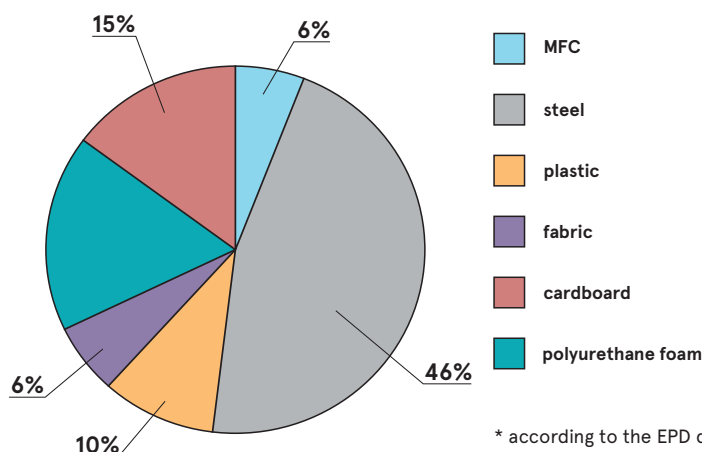

* according to the EPD document

Recyclability **

Recycling: 100% - Downcycling: 0%

Recycled content


34%

Co2 carbon footprint

31,1 kg

** average values for a representative of the group;
values may vary for other products


Technical specification - Mesh

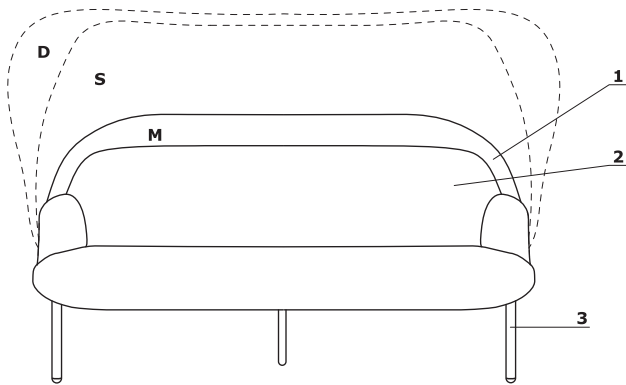

1. **Shield** - frame Ø25 mm, upholstered, two fabric layers attached to the frame with zip
- M - small shield
 - S - medium shield
 - D - large shield
2. **Seat, backrest, armrests** - moulded foam, density of 55 kg/m3, upholstered
3. **Base** - 4-legged, metal, powder coated, Ø25 mm, wall thickness 1,5 mm, CNC-bent, legs finished with polypropylene feet, colour: white - white frame; colour: black - other frame colours


- max. load 120 kg

Technical specification - side tables


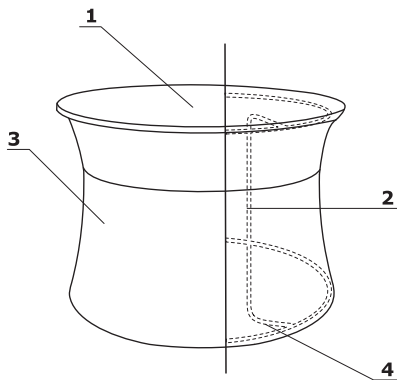


1. **Worktop** - MFC 12 mm
2. **Frame** - tubular structure mounted on the MFC-base, tube Ø16 mm, wall thickness 2 mm, CNC-bent
3. **Fabric** - upholstered - upper and lower part
4. **Feet** - adjustment range 10 mm



Dimensions - Mesh

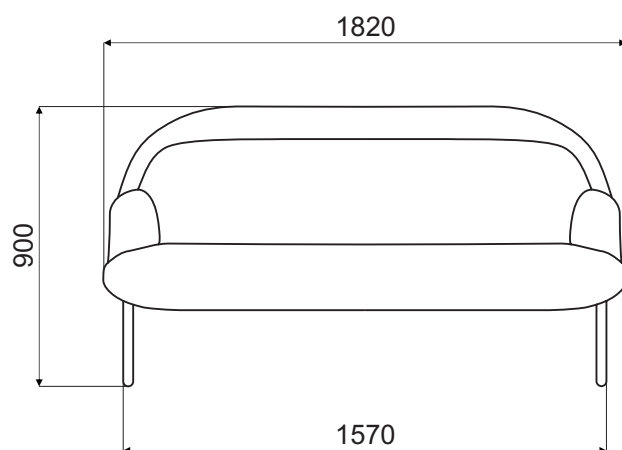


MS1M

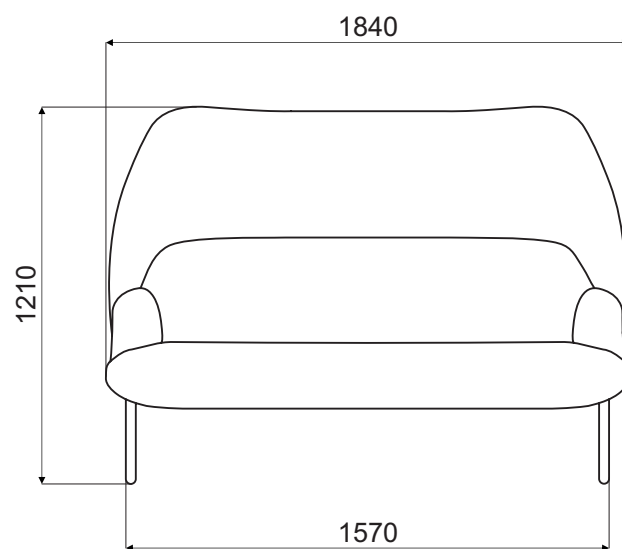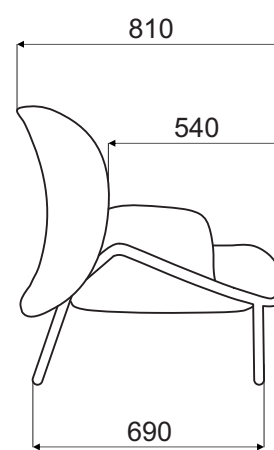


MS1S

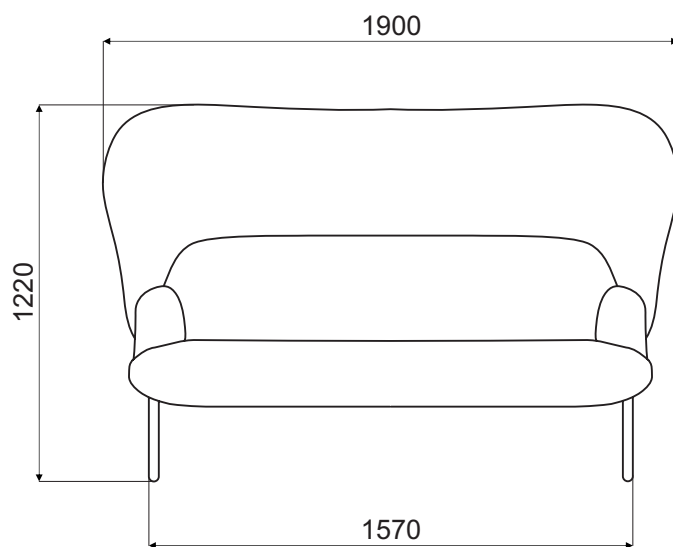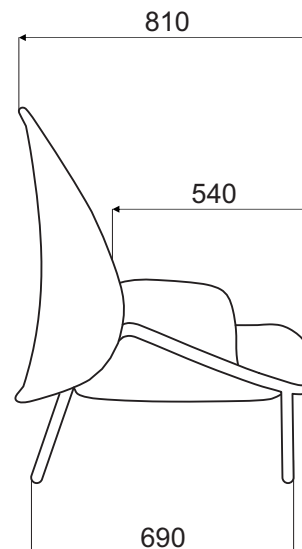


MS1D

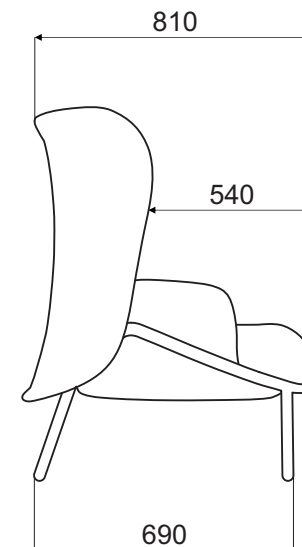

Dimensions – side tables

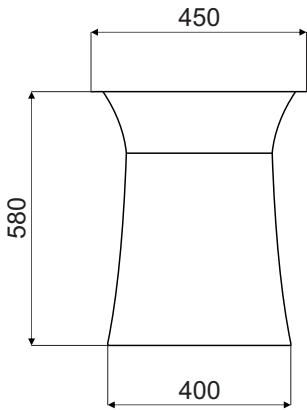


MESHT2

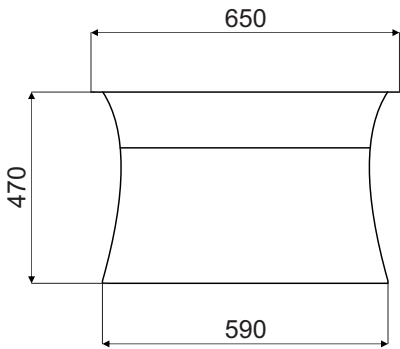


MESHT1


Mesh – sofa *



MS1M
1820 / 810 / 900
46.7 kg



MS1S
1840 / 810 / 1210
44.9 kg



MS1D
1900 / 810 / 1220
48 kg

Side tables *



MESHT2
450 / 450 / 580
4.9 kg



MESHT1
650 / 650 / 470
7.5 kg

* dimensions expressed in millimeters: width x depth x height

Shield, table – base upper and bottom part – Fabric Runner – second price group



Technical data:	
Material	80% polyester, 20% post-consumer recycled polyester
Fabric weight	510 g/lm (16.45 oz/lin.yd.)
Abrasion resistance rubs	BS EN ISO 12947-2 70,000 Martindale cycles
Pilling resistance	scale 1-5, max 5, EN ISO 12945-2 (4-5)
Colour fastness to light	scale 1-8, max 8, EN ISO 105-B02 (5-7)
Colour fastness to rubbing	scale 1-5, max 5, EN ISO 105x12 (wet/dry) 4-5
Acoustic test sound absorption	ISO 354
Flammability	BS EN 1021-2 Match, CA TB 117-2013, BS EN 1021-1 (cigarette) Class Uno UNI 9175 Class 2, EMME

Seat, shield, table – base upper and bottom part – Fabric Medley – second price group



Technical data:	
Material	polyester 100%
Fabric weight	510 g/lm (16.45 oz/lin.yd.)
Abrasion resistance rubs	BS EN ISO 12947-2, 75,000 cykli Martindale
Pilling resistance	scale 1-5, max. 5, EN ISO 12945-2 (4)
Colour fastness to light	scale 1-8, max. 8, EN ISO 105-B02 (5-7)
Colour fastness to rubbing	scale 1-5, max. 5, EN ISO 105x12 (wet/dry) (4-5/4-5)
Acoustic test sound absorption	ISO 354
Flammability	BS EN 1021-1 (cigarette) BS 476 Part 7, Class 2 Class Uno UNI 9174 - UNI 8457 CA TB 117-2013 ASTM E 84 Class I

Seat, shield, table – base upper and bottom part – Fabric Atlantic * – second price group



Technical data:	
Material	polyester 100%
Fabric weight	530 g/lm (17.09 oz/lin.yd.)
Abrasion resistance rubs	BS EN ISO 12947-2, 110,000 Martindale cycles
Pilling resistance	scale 1-5, max. 5, EN ISO 12945-2 (4-5)
Colour fastness to light	scale 1-8, max. 8, EN ISO 105-B02 (5-7)
Colour fastness to rubbing	scale 1-5, max. 5, EN ISO 105x12 (wet/dry)
Flammability	CA TB 117-2013 ASTM E 84 Class I BS EN 1021-2 (match) BS EN 1021-1 (cigarette)

* There is a possibility of ordering the product in full colour spectrum of Atlantic range, as per Gabriel's pattern book, within 8 weeks

Seat – Fabric Vita – second price group



Technical data:

Material	Surface: 98,5% PVC, 1,5% PU Substrate: 50% polyester, 50% Cotton
Fabric weight	850g/m2 ± 10% (1190G/lin. m ± 10%)
Abrasion resistance rubs	BS EN ISO 5470-2, 100,000 Martindale cycles
Colour fastness to light	6 (ISO 105 – B02)
Colour fastness to rubbing	wet: 4, dry: 4 (ISO 105 – X12)
Flammability	BS EN 1021 – (cigarette) BS EN 1021 – 2 (match) BS 5852 – (Ignition Source 5) BS 7176 – (Medium Hazard)
Flexes	BS EN ISO 7854 – Method B, 400.000 Flexing cycles
Anti-microblal / Anti-fungal	AATCC 147

Seat, shield, table – base upper and bottom part – Fabric Charles * – second price group




Technical data:

Material	100% polyester
Fabric weight	433g/m2
Abrasion resistance rubs	90,000 Martindale cycles (EN ISO 12947-2)
Pilling resistance	EN ISO 12945-2, 5
Light fastness	EN ISO 105-B02, 5
Rubbing fastness	dry: 4-5, wet: 4-5, EN ISO 105x12
Flammability	EN 1021, 1

* There is a possibility of ordering the product in full colour spectrum of Charles range, as per Dekoma pattern book, within the standard delivery time.


Seat, shield, table – base upper and bottom part – Fabric Go Check – second price group

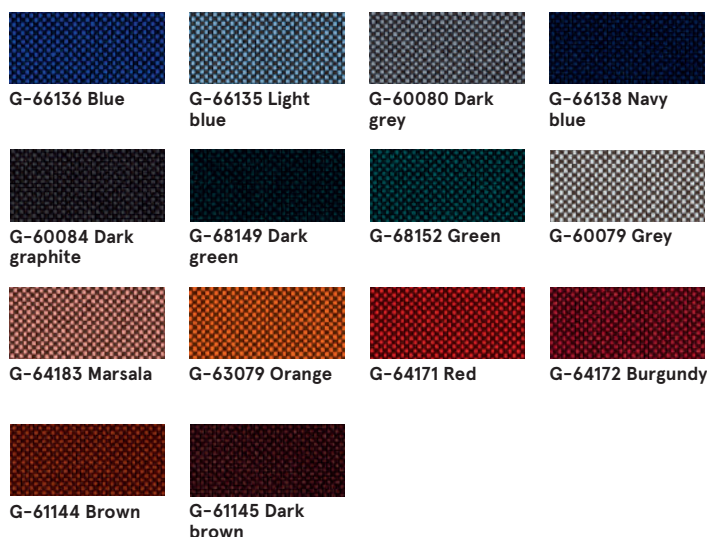

Technical data:

Material	100% Trevira CS
Fabric weight	435g/lm
Abrasion resistance rubs	80,000 rubs martindale (EN ISO 12947-2)
Pilling resistance	scale 1-5, max. 5 – EN ISO 12945-2, 5
Light fastness	scale 1-8, max. 8 – EN ISO 105-B02, 5-8
Rubbing fastness	dry: 4-5, wet: 4-5, scale 1-5, max. 5 – EN ISO 105x12
Flammability	BS EN 1021 1&2 Cigarette and Match BS EN 1021-1 Cigarette BS 5852 Crib 5 BS 7176 Medium hazard DIN 4102 – B1 NFP 92-503/504/505 M1 ÖNORM A3800-B1-B3825-Q1 UK Class Uno UNI 9175 Class 1 I EMME FAR/JAR 25.853 (a) (i) (ii) CA TB 117-2013 DIN EN 13501-1 B-s1,d0 AM 18 – NF D 60-013-(only for fabric)

Seat, shield, table – base upper and bottom part – Fabric Mica – second price group

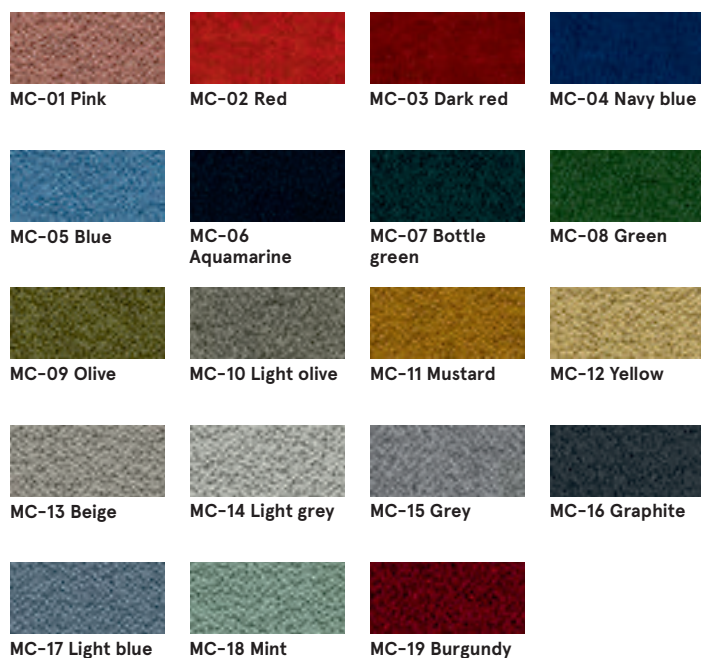

Technical data:

Material	post-consumer recycled polyester 97%, polyester 3%
Fabric weight	305 g/lm
Abrasion resistance rubs	60,000 rubs martindale (EN ISO 12947-2)
Pilling resistance	scale 1-5, max. 5 – EN ISO 12945-2, 4-5
Light fastness	scale 1-8, max. 8 – EN ISO 105-B02, 5-8
Rubbing fastness	dry: 4-5, wet: 4-5, scale 1-5, max. 5 – EN ISO 105x12
Flammability	CA TB 117-2013 ASTM E 84 Class I BS EN 1021-1 Cigarette BS EN 1021-2 Match BS 476 Part 7 class I

Fabric Synergy – third price group



Technical data:

Composition	95% Virgin Wool, 5% Polyamide
Fabric weight	400g/m ² (560g/lm)
Abrasion resistance rubs	100.000 Martindale cycles
Colour fastness to light	ISO 105 – B02
Colour fastness to rubbing	EN ISO 105x12 (dry/wet)
Flammability	EN 1021 – 1&2 (cigarette & match)
	BS 7176 Low Hazard
	NF D 60-013
	ÖNORM B 3825 & A 3800-1 (58 kg/m ³ CMHR Foam)
	UNI 9175 Classe 1 IM
	EN 13501-1 Adhered Class D, s1, d0
	IMO FTP Code (Part 8)
	The Furniture and Furnishing (Fire) (Safety) Regulations 1988 (Domestic Cigarette and Match)
	BS 5852 Ignition Source 5 when FR treated
	BS 7176 Medium Hazard when FR treated
	EN 13501-1 Adhered Class B, s1, d0 when FR treated
	EN 13501-1 Un-adhered Class D, s2, d0 when FR treated
	BS 5867-2: Type B Curtains & Drapes when FR treated

Fabric Silvertex – third price group

Technical data:

Material	Topcoat: 100% Vinyl
	Backing: 100% Polyesterr Hi-Loft™
Fabric weight	685 gr/m ²
Abrasion resistance	>300,000 cycles Martindale
UV-resistance	>= 7 (1000 hours, blue wool scale)
Cold Crack resistance	-23°C
Flame retardancy	NF P 92-503 / M2
	EN 1021, Part 1&2
	DIN 4102 B2
	ÖNORM B 3825, Gruppe I – Schwerbrennbares Verhalten
	ÖNORM A 3800, Teil I, Qualmbildungsklasse QI – schwachqualmend
	IMO Res. MSC.307 (88) (2010 FTP Code) Annex I Part 8
	(MED) Marine Equipment Directive in its current valid version
	UNI 9175 (1987) / UNI 9175/FAI (1994) Classe I.IM (uno I EMME)
	UNE 23.727-90 IR /M2
	EN 71-2: 2006+AI: 2007 Safety of Toys – Part 2: Flammability
	ECE R 118 (replaces Directive 95/28/EC)
	FMVSS 302
	FAR 25/853
Antimicrobial	Antifungal Protection, Antibacterial Protection, Antimycotic Protection

There is a possibility of ordering the product in full colour spectrum of Silvertex range, as per Spradling's pattern book, within 15 working days.

Fabric Tessa – third price group



Technical data:

Material	95% polyester, 5% acrylic
Fabric weight	500g/m ²
Abrasion resistance rubs	75,000 Martindale cycles (EN ISO 12497-2)
Pilling resistance	EN ISO 12945-2, 4-5
Light fastness	EN ISO 105-B02, 4
Rubbing fastness	dry: 4-5, wet: 4-5, EN ISO 105x12


Fabric Oceanic – third price group



Technical data:

Material	100% post-consumer recycled polyester
Fabric weight	497g/m ²
Abrasion resistance rubs	100,000 Martindale cycles (EN ISO 12947-2)
Pilling resistance	EN ISO 12945-2, 5
Light fastness	EN ISO 105-B02, 5
Rubbing fastness	dry: 4, wet: 4, EN ISO 105x12
Flammability	EN 1021, - 1&2 (Cigarette and Match) BS 7176 Low Hazard BS 5852 Ignition Source BS 7176 Medium Hazard

Fabric Quest – third price group

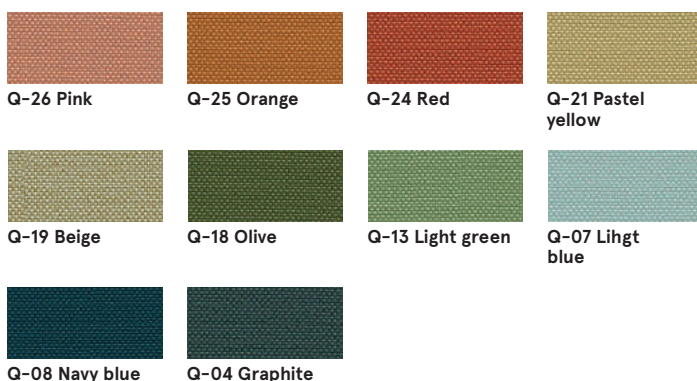

Technical data:

Material	100% post-consumer recycled polyester
Fabric weight	330g/m ²
Abrasion resistance rubs	100,000 Martindale cycles (EN ISO 12947-2)
Light fastness	EN ISO 105-B02, 4-6
Rubbing fastness	dry: 4, wet: 4, EN ISO 105x12
Flammability	EN 1021, - 1&2 (Cigarette and Match) BS 7176 Low Hazard UNI 9175 Classe 1 IM BS 476 Part 7 Class 1Y (Adhered) EN 13501-1 Adhered Class B, s1, d0 EN 13501-1 Un-adhered Class B, s1, d0 BS 5852 Ignition Source 5 with EnviroFlam5 BS 7176 Medium Hazard with EnviroFlam5 IMO FTP Code (Part 8) with EnviroFlam5

Fabric Grain – third price group



Technical data:

Material	92% post-consumer recycled polyester 8% polyester
Fabric weight	615g/m ²
Abrasion resistance rubs	100,000 Martindale cycles (EN ISO 12947-2)
Pilling resistance	EN ISO 12945-2, 5
Light fastness	EN ISO 105-B02, 5-7
Rubbing fastness	dry: 4-5, wet: 4-5, EN ISO 105x12
Flammability	BS EN 1021 1&2 Cigarette and Match BS EN 1021-1 Cigarette CA TB 117-2013


Fabric Atlas – fourth price group



Technical data:

Material	90% new wool, 10% nylon
Fabric weight	286g/m ² , 400g/lm
Abrasion resistance rubs	100,000 cykli Martindale, EN ISO 12947
Colour fastness to light	ISO 105 B02: 6-7
Colour fastness to rubbing	ISO 105-X12:2001, (wet/dry) 4-5/4-5
Flammability	BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 5 5852 Crib 5, BS 5852 ignition source 3, BS 5852 Part 1, NF D 60 013, UNI 9175 1IM, US Cal. Bull. 117-2013


Leather – fourth price group

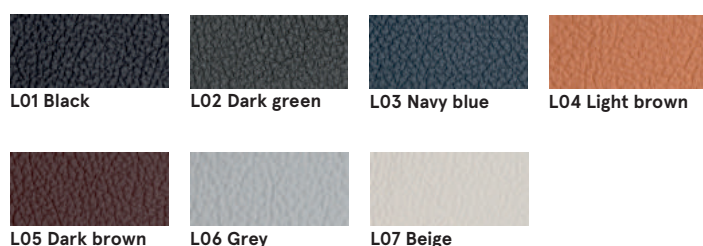

Technical data:

Material	Leather type - corrected grain leather
Abrasion resistance rubs	Type of finishing - pigmented leather Dry: 500 cycles - min. 4 grey scale Wet: 250 cycles - min. 4 grey scale UNI EN ISO 11640
Colour fastness to light	Light fastness: min. 4 grey scale, UNI ISO 105-802
Flammability	No ignition UNI EN 1021-1-2006 BS EN 1021-1-2006

Base

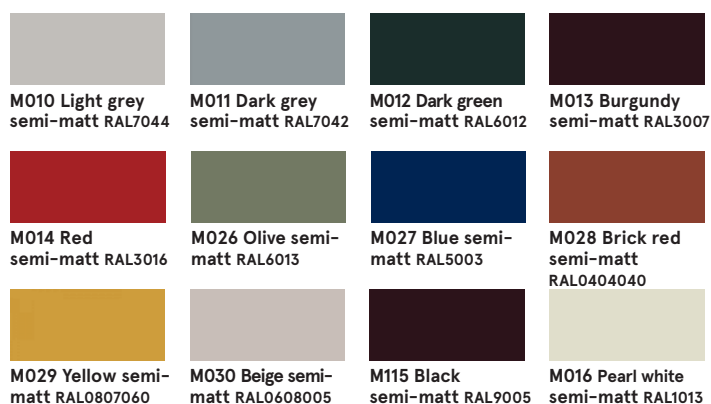

Side tables – top



Omega Ekspres SIA

LV40003402577

Biroja adrese: Lāčplēša 125, LV-1003, Rīga

www.city-office.lv

info@city-office.lv

Mesh – sofa	Date of preparation 12.12.2022	The data contained in this document is valid in the day of its preparation. Change of the product, as long as it does not affect the basic features of it, does not require consistent updates of the document.	page 12/12
			colours